
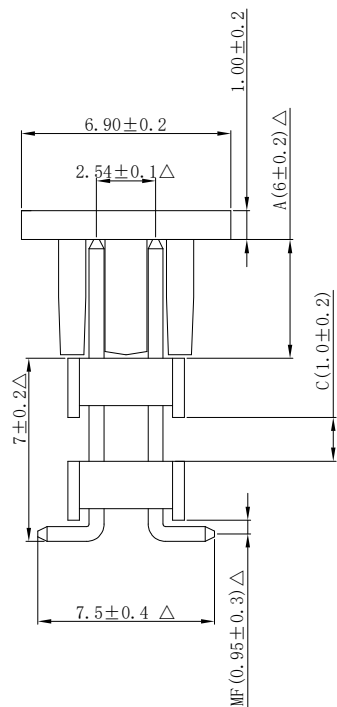


P.C.B Hole Layout

### Specifications

|                                    |                      |
|------------------------------------|----------------------|
| Current Rating                     | :3 Amps              |
| Insulator Resistance               | :5000 Megohms min.   |
| Dielectric Withstanding            | :AC 1000 V           |
| Operating Temperature              | :-40°C ~ +105°C      |
| Soldering Temperature              | :260°C for 3~5s Max. |
| Contact Material                   | :Copper Alloy        |
| Insulator Material                 | :Polyester, UL 94V-0 |
| Standard                           | :Nylon-6T            |
| Finish: Tin, Gold or Duplex Plated |                      |
| Standard: Gold Flash all over      |                      |

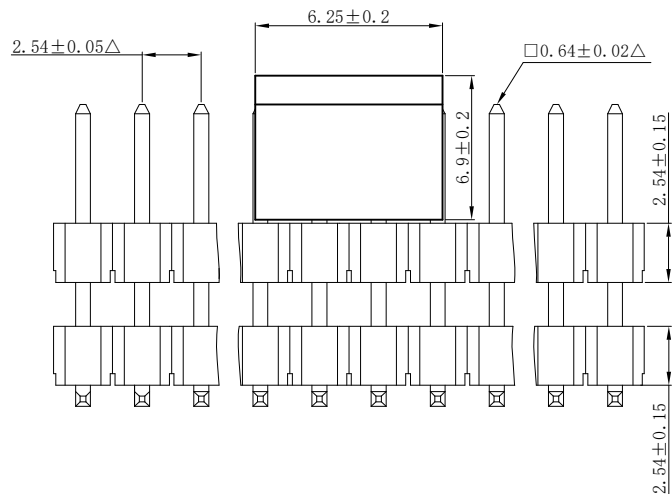

|  |                                |   |                           |  |            |                     |                   |
|--|--------------------------------|---|---------------------------|--|------------|---------------------|-------------------|
| Series   | Connector Type                 | Contact Plating   | Material                  | Pin Length   | mm         | Number of Contacts  | Other             |
| <b>P221</b>                                      | <b>X</b>                       | <b>X</b>  | <b>X</b>                  | <b>A / C</b>   |            | <b>XX</b>           | <b>RC</b>         |
| (Pin Header Double Row)<br>P221 (H: 2.54 展開 7.5) | M: SMT Type<br>MF: 0.95mm<br>: | G: Gold Flash<br>T: Tin Plated<br>A: 10U"Gold<br>B: 15U"Gold<br>C: 20U"Gold<br>©Duplex Plating<br>D: Gold Flash/Tin (Standard: G) | N: Nylon-6T (Standard: N) | A<br>(060)   | C<br>(010) | (04 TO 80 Contacts) | R: REEL<br>C: CAP |
|  |                                |   |                           | (If you desire on other length, by marking put desired in the A/C) |            |                     |                   |

**KNT** 东莞市康耐特科技有限公司  
Dongguan KNT-Electronics Technology Co., LTD  
TEL: +860769-83999188 +860769-83999660

DESCRIPTION (内容):  
2.54mm Pin Header H: 2.54 SMT □=0.64  
CAP+REEL Nylon-6T, 雙排雙膠

PART NO:  
(料號) P221-MFGN-060/010-XX-RC

DWG NO (圖號): 031

DRAWN (製圖): DWP

CHECKED (確認):

APPROVAL (核准):

GENERAL TOLERANCE: (公差)

SCALE (比例): 1:XX

REV: A/1

UNIT: mm

SIZE: A4

SHEET: 1/1

| REV | DESCRIPTION   | DATE       |
|-----|---------------|------------|
| 1   | △ 此符號表示重點管控尺寸 | 2022.05.30 |
| 2   |               |            |
| 3   |               |            |
| 4   |               |            |